SCANGLE

Professional POS hardware manufacturer

K5w

Compact multi-configuration(s) integrated POS system






Stable, reliable POS terminal that's made to last

Great reliability and an industrial project: **Scangle K5** is ideal for point-of-sale applications that require larger workload in multiple environments. The terminal is developed to support any kind of software application thanks to different CPU performance levels. K5 establishes a new standard for touchscreen terminals, with top-notch RAM and SSD. Thanks to the easy-access SSD with detached slot, it won't be hard to open the device in case of assistance. This terminal is developed to be flexible, and can easily updated to become your company's most loyal helper.

Affordable and offering good value for money given its many advantages, this hardware means profitable investment for the development of durable POS IT assets and infrastructures.

And offer OEM & OEM service !

K5w Touch POS Terminal

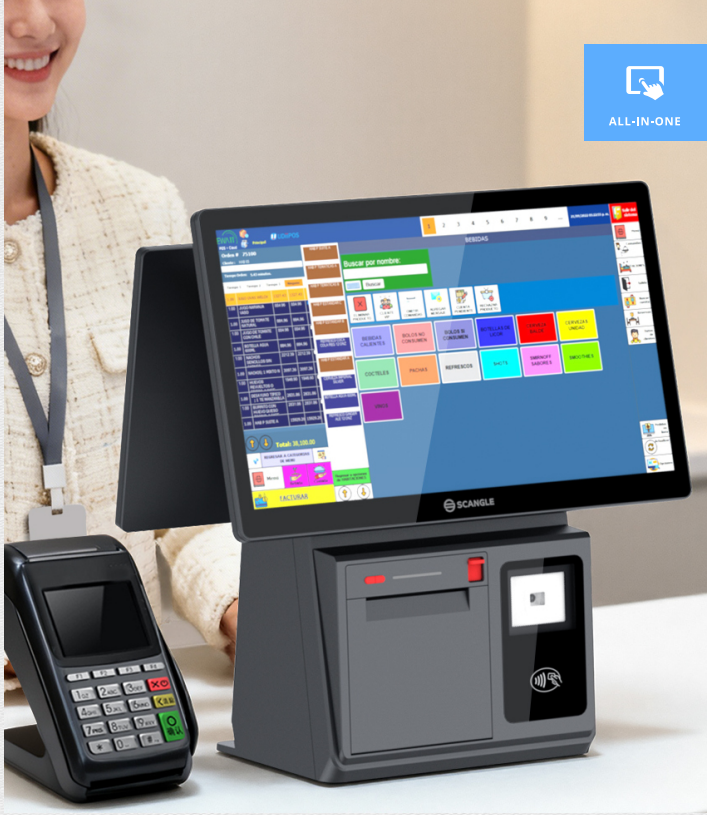

CHARACTERISTICS

1. Field upgradeable
Quickly upgradeable RAM and SSD to increase system spec

2. Multiple CPU options
Celeron J4125/J6412/N95/N97/N100, Intel I3/i5/I7

3. Inbuilt 80MM thermal Printer
Commands support: ESC/POS /OPOS Driver , interface USB/RS232/ bluetooth. Support thermal receipt & thermal Label. Load paper size **80*80mm**,Printing speed: 250mm/sec, Cash drawer: (9-24V)

4. Multiple operating systems
Windows 10/11 IoT, Windows 10/11pro, and Linux

5. Multiple customer display
10.1"/ 14.1" / 15.6" customer display / VFD display 20*2 lines



14.1"or 15.6" cusotmer display
With Tap pay on screen (optional)



Concealed wiring, clean and simple



Inbuilt thermal printer/ NFC /Barcode scanner

MODEL	K5w Windows
Processors	Intel® Celeron J6412 (default) optional: J4125/ N95/N97/ N100/ i3/i5/ i7
Memory	DDR4 RAM 4GB standard optional: 8GB /16GB /32GB
Graphics chipset	Intel® UHD Graphics
SSD	NVMe M.2 2242 : 1x128GB standard (2 slots) optional: 256GB/512GB
LCD	15.6" FHD (1920*1080 pixel) optional: 15.6" HD (1366*768) LED backlighting
Touch Screen	PCAP panel
Brightness	350 cd/m²
Printer	Inbuilt 80mm Thermal Printer Paper size: 80*80mm or 58*80mm (thermal receipt & thermal sticker) Support : ESC/POS commands & OPOS driver Interface: USB+RS232 port / Bluetooth
Serial ports	1 serial ports
USB	3 x USB 2.0 + 2x USB 3.0
LAN	Gigabit Ethernet x 1 (RJ-45)
VGA	VGA display port / HDMI x 1
Cashdrawer	(RJ-12 6 Pins) x 1 / support (9-24V) cash drawer
Audio	1x Jack
Power supply	1x DC, 12V, 7A
Certification	CE, FCC, RCM, UKCA, UL
Colour	Black
Dimensions (L x D x H)	370 x 182 x406 mm
Weight	4.5 kg depending on version and options
Compatible OS	Windows 10 /11 Pro / IoT Enterprise, Linux

OPTIONS	
I-Button DALLAS reader	1 slot (USB or RS232 port)
2nd screen	10.1"/14.1"/ 15.6" LCD display (1920*1080 Pixel)/ VFD display
WIFI	802.11 b/g/n, 2.4/5G
Customer display	VFD (2 x 20)
NFC	NFC reader (USB or COM port) or Tap pay on screen
Barcode reader	1D/2D/QR code reader

SCANGLE

Professional POS hardware manufacturer

www.scangle.com sales@scangle.com